


## Arandelas ciegas para prensaestopas



**Materiales**  
Polietileno.

**Certificados y normas aplicables**

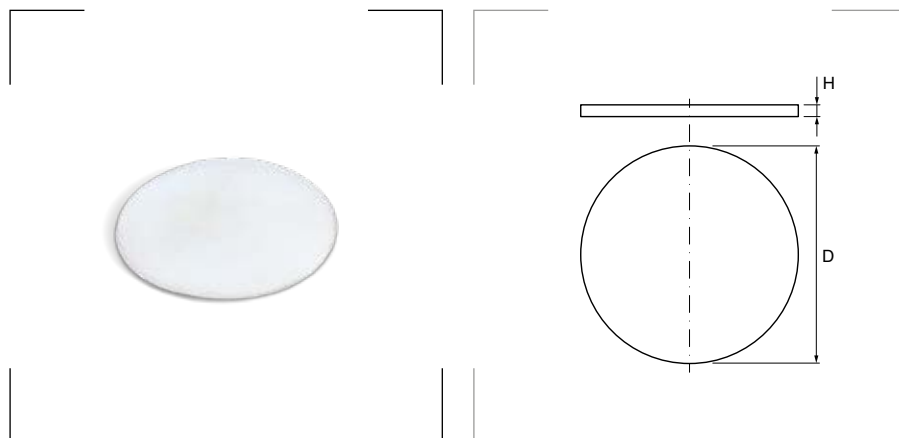

**Temperatura de trabajo**  
-30°C hasta +80°C.

### Rosca PG

| Referencia | PG<br>DIN 40430 | D<br>Ø mm | H<br>mm | Embalaje<br>Unidades |
|------------|-----------------|-----------|---------|----------------------|
| 890.0700.0 | PG 7            | 10,5      | 0,5     | 100                  |
| 890.0900.0 | PG 9            | 13,5      | 0,5     | 100                  |
| 890.1100.0 | PG 11           | 17,0      | 0,5     | 100                  |
| 890.1300.0 | PG 13,5         | 18,5      | 0,5     | 100                  |
| 890.1600.0 | PG 16           | 20,5      | 0,5     | 100                  |
| 890.2100.0 | PG 21           | 26,0      | 0,5     | 100                  |
| 890.2900.0 | PG 29           | 35,0      | 0,5     | 100                  |
| 890.3600.0 | PG 36           | 45,0      | 0,5     | 100                  |
| 890.4200.0 | PG 42           | 52,0      | 0,5     | 100                  |
| 890.4800.0 | PG 48           | 57,0      | 0,5     | 100                  |