


## Codos

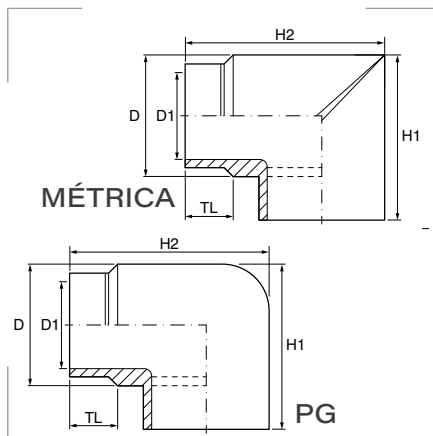

**Grado de protección**  
Polvo/agua: IP65.

**Materiales**  
Métrica: Latón niquelado.  
PG: Zinc.

**Certificados y normas aplicables**



EN 60423  
DIN 40430

### Rosca métrica

Referencia	Métrica EN 60423	D1 mm	D mm	TL mm	H1 mm	H2 mm	Emb. uds.
540.1200.0	M 12 x 1,5	8	15	5	24,5	24,5	50
540.1500.0	M 16 x 1,5	12	19	5	29,0	30,0	50
540.2000.0	M 20 x 1,5	16	24	6	36,5	36,0	50
540.2500.0	M 25 x 1,5	21	29	7	42,0	43,5	25
540.3200.0	M 32 x 1,5	26	36	7	50,0	51,0	25
540.4000.0	M 40 x 1,5	35	46	8	66,0	65,5	10
540.5000.0	M 50 x 1,5	45	56	9	76,5	77,5	10

### Rosca PG

Referencia	Métrica EN 60423	D1 mm	D mm	TL mm	H1 mm	H2 mm	Emb. uds.
540.0900.0	PG 9	11	18,0	5,5	29	31	50
540.1100.0	PG 11	15	22,5	6,0	34	36	50
540.1300.0	PG 13,5	16	24,5	6,0	36	40	50
540.1600.0	PG 16	18	26,5	7,5	39	43	50
540.2100.0	PG 21	24	34,0	7,5	46	49	25
540.2900.0	PG 29	31	42,0	8,0	54	56	10