


Juntas de material IT resistente al aceite

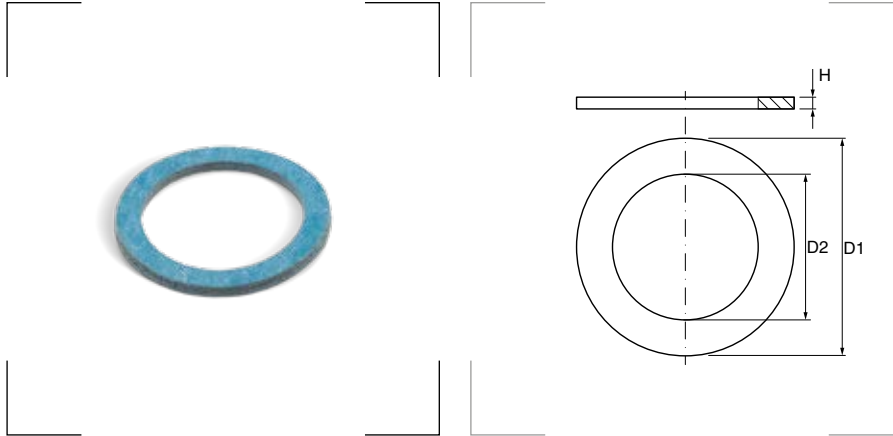

Materiales
Fibra de aramida y goma de nitrilo NBR.

Colores
Azul

Certificados y normas aplicables



Temperatura de trabajo
-50°C hasta +250°C.

Rosca métrica

Referencia	Métrica ES 60423	D1 mm	D2 mm	H mm	Embalaje unidades
874.1200.0	M 12	16,5	12,5	2,0	100
874.1600.0	M 16	19,0	16,0	2,0	100
874.2000.0	M 20	25,0	20,4	2,0	100
874.2500.0	M 25	33,5	25,0	2,0	100
874.3200.0	M 32	37,0	32,0	3,0	100
874.4000.0	M 40	48,0	40,0	3,0	100
874.5000.0	M 50	59,0	50,0	3,0	100
874.6300.0	M 63	70,0	63,0	3,0	100

Rosca PG

Referencia	PG DIN 40430	D1 mm	D2 mm	H mm	Embalaje unidades
872.0700.0	PG 7	16,5	12,5	2,0	100
872.0900.0	PG 9	19,0	15,2	2,0	100
872.1100.0	PG 11	22,5	18,6	2,0	100
872.1300.0	PG 13,5	25,0	20,4	2,0	100
872.1600.0	PG 16	27,0	22,5	2,0	100
872.2100.0	PG 21	33,5	28,3	3,0	100
872.2900.0	PG 29	43,5	37	3,0	100
872.3600.0	PG 36	55,0	47	3,0	100
872.4200.0	PG 42	63,0	54	3,0	100
872.4800.0	PG 48	69,0	59,3	3,0	100