


## Juntas planas de estanqueidad

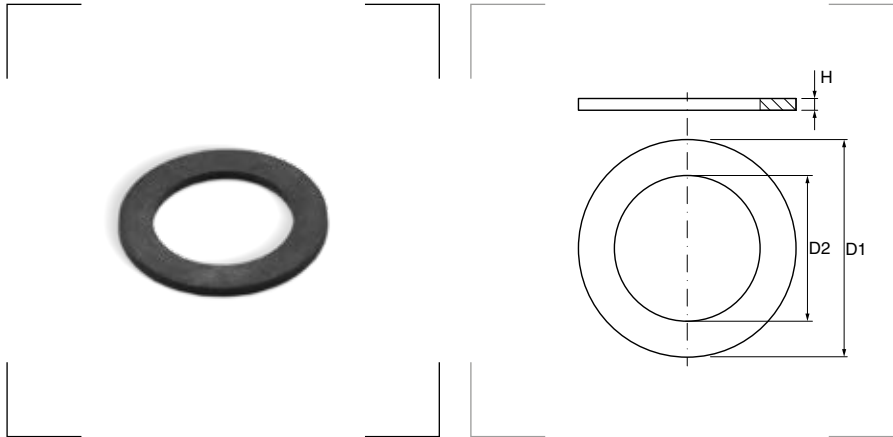

**Materiales**

Caucho de nitrilo NBR Perbunan®.

**Certificados y normas aplicables**



**Temperatura de trabajo**

-20°C hasta +120°C.

**Rosca métrica**

Referencia	Métrica ES 60423	D1 Ø mm	D2 Ø mm	H mm	Embalaje unidades
870.1015.0	M 10	17	10	1,5	50
870.1215.0	M 12	20	12	1,5	50
870.1615.0	M 16	23	16	2,0	50
870.2015.0	M 20	29	20	2,0	50
870.2515.0	M 25	37	25	2,0	50
870.3215.0	M 32	44	32	2,0	25
870.4015.0	M 40	52	40	2,0	25
870.5015.0	M 50	64	50	2,5	25
870.6315.0	M 63	66	60,5	3,0	10

**Rosca PG**

Referencia	PG DIN 40430	D1 Ø mm	D2 Ø mm	H mm	Embalaje unidades
870.0700.0	PG 7	16,0	11,5	2,0	50
870.0900.0	PG 9	20,0	14,0	2,0	50
870.1100.0	PG 11	22,5	18,5	2,0	50
870.1300.0	PG 13,5	25,0	19,0	2,0	50
870.1600.0	PG 16	27,0	21,0	2,0	50
870.2100.0	PG 21	34,0	27,0	2,5	25
870.2900.0	PG 29	43,0	35,0	2,5	25
870.3600.0	PG 36	54,0	45,0	2,5	25
870.4800.0	PG 48	68,0	57,5	3,0	10