


Juntas tóricas resistente al aceite

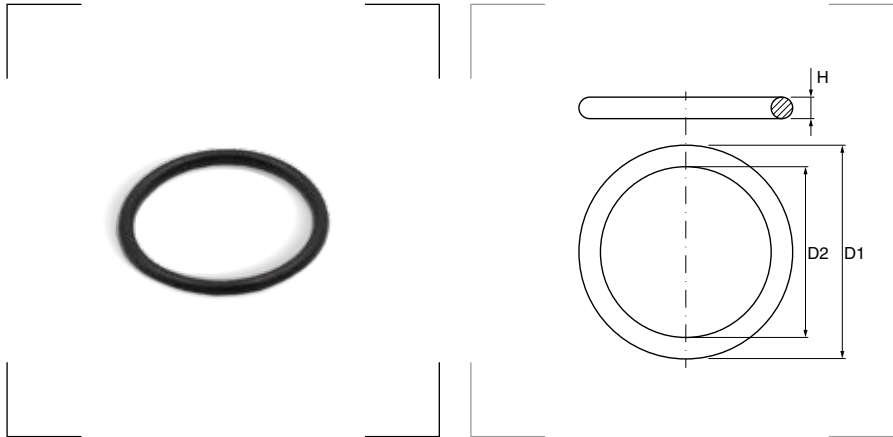

Materiales

Caucho de nitrilo NBR Perbunan®.

Certificados y normas aplicables



Temperatura de trabajo

-40°C hasta +140°C.

Rosca métrica

Referencia	Métrica ES 60423	D1 Ø mm	D2 Ø mm	H mm	Embalaje unidades
871.1215.0	M 12	13	10	1,5	100
871.1615.0	M 16	16	13	1,5	100
871.2015.0	M 20	19	16	1,5	100
871.2515.0	M 25	26	22	2,0	100
871.3215.0	M 32	33	29	2,0	100
871.4015.0	M 40	41	37	2,0	100
871.5015.0	M 50	51	47	2,0	100
871.6315.0	M 63	64	60	2,0	100

Rosca PG

Referencia	PG DIN 40430	D1 Ø mm	D2 Ø mm	H mm	Embalaje unidades
871.0700.0	PG 7	13	10	1,5	100
871.0900.0	PG 9	16	13	1,5	100
871.1100.0	PG 11	19	16	1,5	100
871.1300.0	PG 13,5	21	18	1,5	100
871.1600.0	PG 16	23	20	1,5	100
871.2100.0	PG 21	29	25	2,0	100
871.2900.0	PG 29	37	33	2,0	100
871.3600.0	PG 36	47	43	2,0	100
871.4200.0	PG 42	54	50	2,0	100
871.4800.0	PG 48	59	55	2,0	100