


Tapones metálicos ciegos

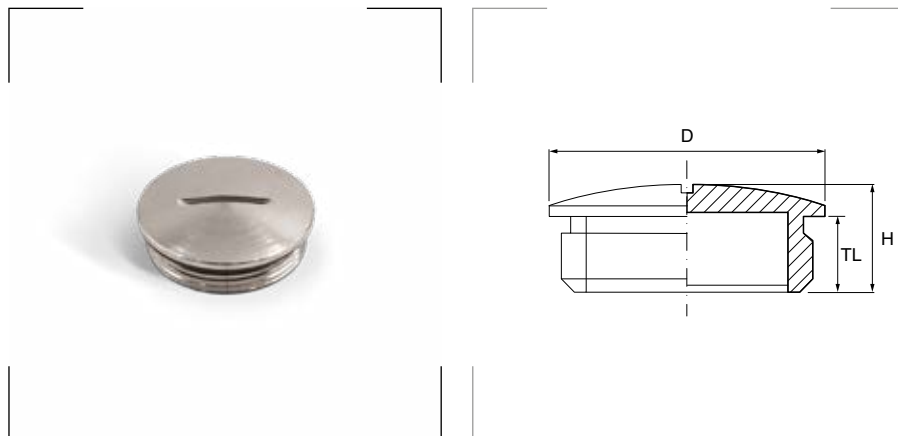

Grado de protección

Polvo/agua: IP54 sin junta.
Polvo/agua: IP68 con junta.

Materiales

Latón niquelado.
Junta tórica de goma de nitrilo NBR*.

Certificados y normas aplicables



EN 60423
DIN 40430

Rosca métrica

Referencia	Métrica EN 60423	D Ø mm	H mm	TL mm	Emb. uds.
755.1200.0	M 12 x 1,5	14	7,5	5	100
755.1600.0	M 16 x 1,5	18	8,0	5	100
755.2000.0	M 20 x 1,5	22	9,5	6	100
755.2500.0	M 25 x 1,5	28	11,0	7	100
755.3200.0	M 32 x 1,5	35	12,0	8	50
755.4000.0	M 40 x 1,5	43	13,0	8	50
755.5000.0	M 50 x 1,5	53	15,0	9	25
755.6300.0	M 63 x 1,5	66	16,0	10	10

Rosca PG

Referencia	PG DIN 40430	D Ø mm	H mm	TL mm	Emb. uds.
750.0700.0	PG 7	14	8,0	5,0	100
750.0900.0	PG 9	17	9,0	6,0	100
750.1100.0	PG 11	20	9,0	6,0	100
750.1300.0	PG 13,5	22	9,5	6,5	100
750.1600.0	PG 16	24	9,5	6,5	100
750.2100.0	PG 21	30	11,0	7,0	50
750.2900.0	PG 29	39	12,0	8,0	25
750.3600.0	PG 36	50	15,0	9,0	50
750.4200.0	PG 42	57	16,0	10,0	25
750.4800.0	PG 48	64	16,0	10,0	25

Rosca métrica con junta tórica NBR*

Referencia	Métrica EN 60423	D Ø mm	H mm	TL mm	Emb. uds.
758.1200.0	M 12 x 1,5	14	7,5	5	100
758.1600.0	M 16 x 1,5	18	8,0	5	100
758.2000.0	M 20 x 1,5	22	9,5	6	100
758.2500.0	M 25 x 1,5	28	11,0	7	100
758.3200.0	M 32 x 1,5	35	12,0	8	50
758.4000.0	M 40 x 1,5	44	13,0	8	50
758.5000.0	M 50 x 1,5	54	15,0	9	25
758.6300.0	M 63 x 1,5	67	16,0	10	10